





HENRAD

DISCOVER ARNO SINGLE E

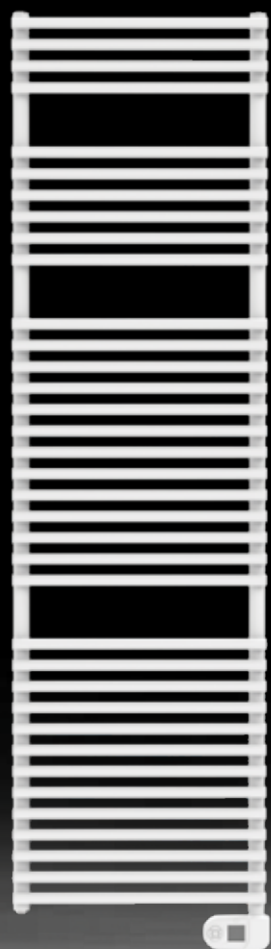

ELECTRICAL RANGE

GENERAL INFORMATION

ARNO SINGLE E

An attractive white electric tubular towel radiator, offering timeless elegance and functional energy efficiency. A perfect choice for bathrooms, the Arno Single E electric towel radiator features a simple and elegant steel tube on tube design that provides adequate and convenient hanging space for towels.

- Product:** Electric vertical round tube-on-tube design radiator
Pre-installed: Prefilled with heating liquid, equipped with a thermostat and a 1,2 m insulated cable with plug.
Also supplied: Brackets, screws, plugs and manual
Control: Operated via integrated thermostat with weekly programming, open window detection, presence detection and boost function.
Packaging: Every radiator is sturdily packaged in high-quality cardboard and wrapped in plastic. The radiator's characteristics are shown on the label: electric power – height – length.
Warranty: 10 years for the radiator and 2 years for the electrical components, as long as the installation instructions have been followed, Henrad's warranty conditions have been met and the radiator is installed outside the splash area.
Paint process: All radiators are degreased, phosphated and powder-coated.
Colour: Traffic White
Conformity: EcoDesign 2018 (EU Regulation 2015/1188)
Technical data: Voltage 230V ~50Hz, IP34, Class II
Heights: 1.195 | 1.523 | 1.810 mm
Number of tubes: 23 | 29 | 36
Lengths: 500 | 600 mm
Depth: 56 mm
Output: 500 | 700 | 1.000 W
Tubes: horizontal, O-section, diameter 22 mm
Collectors: vertical, O-section, diameter 35 mm

Height	Length	Output	Art. N°.	Tubes	Colour
H1195	L500	500 W	7001B1195010500	23	Traffic white
H1523	L500	700 W	7001B1523010500	29	
H1810	L600	1.000 W	7001B1810010600	36	



ECODESIGN
2018 COMPLIANT



ELECTRICAL RANGE

MOUNTING AND INSTALLATION


Since the Arno Single E is a class II heater with an IP34 protection rating, it can be installed as such, in volume 2 or 3 of the bathroom (see figure), provided that it is shielded from water splashes and that the radiator is out of reach of persons in the bath or under the shower.

Furthermore, when installed in volume 2, the radiator must additionally be shielded by means of a fixed wall.

The radiator must be installed with the heating element vertically and the electrical wire in the lower section. It is prohibited to install the device with the electrical wire in the upper section or with the heating element horizontally.


The appliance is insulated according to class II and is therefore not earthed. It needs to be powered by a single-phased current of 230V ~50 Hz.

The plug should be connected to a wall socket placed in volume 3.

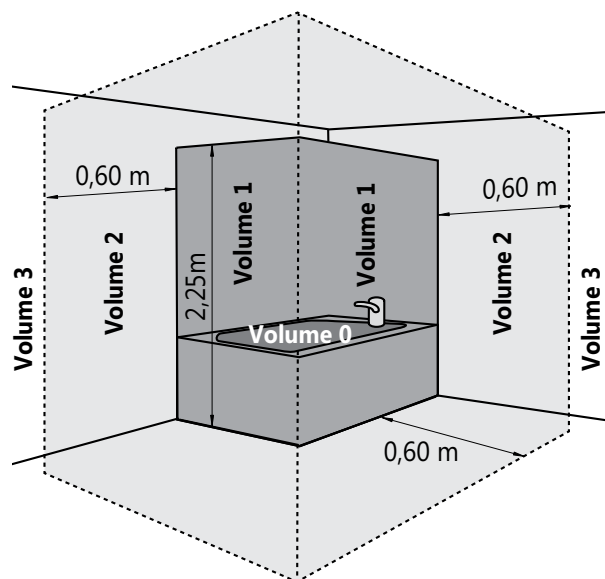

ATTENTION:

Malfunctioning control units need to be replaced by an identical model after consulting your wholesaler. When replacing the control unit by a different model, both warranty and conformity with the safety regulations will be void. In France, the installation of electric radiators with plugs is prohibited.

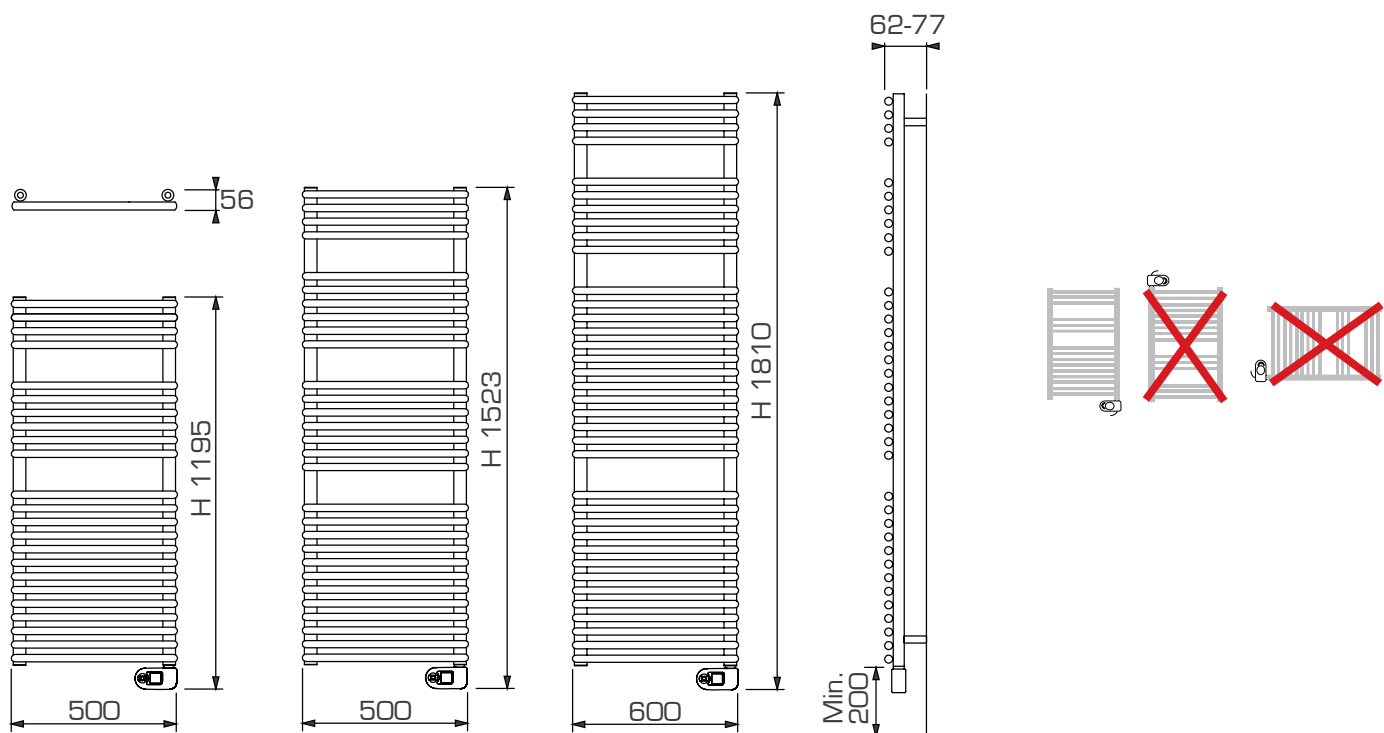


[click here](#)



The assembly instructions are available on [our website](#), technical data of Arno Single E or via the QR-code:

Australia • Belgium • Cyprus • Czechia • France • Germany • Greece • Iceland • Lithuania
Luxembourg • Norway • Poland • Slovenia • Sweden • The Netherlands • Tunisia • Ukraine



HENRAD

Henrad nv
Welvaartstraat 14 box 6 • 2200 Herentals • Belgium

WWW.HENRAD.EU

